

INDIVIDUAL RACK EMBED MOUNT: SECTION

SCALE: 3/4"=1'-0"

**MANUFACTURER**


1. OPTION 1: CUSTOM STAINLESS STEEL 'U' RACK AS FABRICATED BY C.F. MOORES COMPANY, OR EQUAL.
2. OPTION 2: MODEL UX238-U, STAINLESS STEEL AS FABRICATED BY MADRAX DIVISION, GRABER MANUFACTURING, OR EQUAL.

**INSTALLATION**

1. SLIDE BASE PLATE ONTO RACK.
2. SET RACK IN CONCRETE FOOTING 10" x 18" MINIMUM.
3. SET FOOTING BELOW FINISHED PAVERS OR PAVING SURFACE. FOOTING SHOULD NOT BE VISIBLE.
4. SLIDE BASE PLATE COVERING INTO PLACE WHERE RACK MEETS GRADE.


**NOTES**

1. BIKE RACKS, HARDWARE, AND FASTENERS TO BE #316 MARINE GRADE STAINLESS STEEL.
2. CONFIRM SINGLE OR MULTIPLE RACK INSTALLATIONS AND INSTALLATION METHOD WITH OFFICE OF THE UNIVERSITY ARCHITECT.
3. BIKE RACKS IN PUBLIC RIGHT-OF-WAYS MUST CONFORM TO CITY OF PHILADELPHIA'S COMPLETE STREETS DESIGN HANDBOOK.

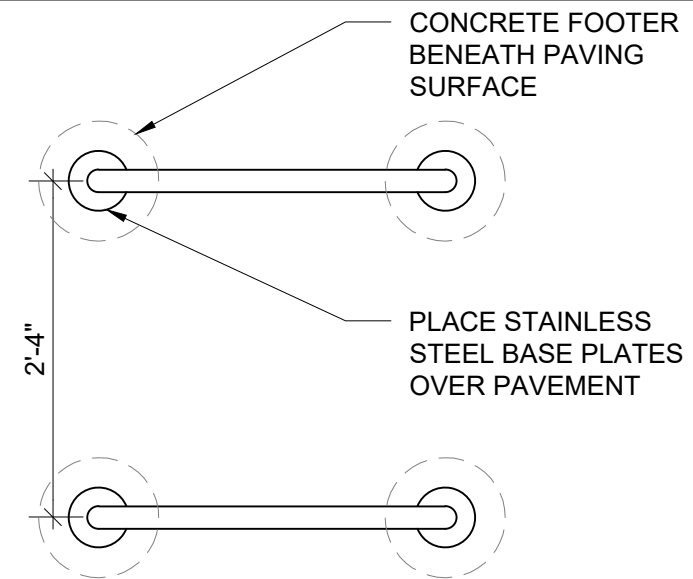

PERPENDICULAR RACK SURFACE MOUNT: PLAN

SCALE: 3/4"=1'-0"

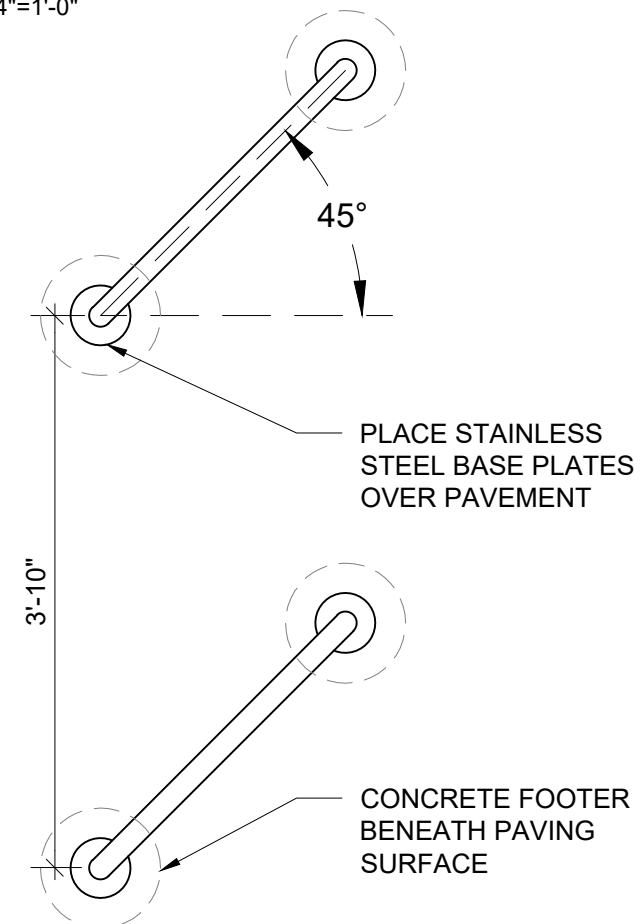

DIAGONAL RACK SURFACE MOUNT: PLAN

SCALE: 3/4"=1'-0"

CSI 12 93 13 - 3

EMBEDDED BICYCLE RACK  
LANDSCAPE STANDARDS



PRIOR TO CONSTRUCTION, CONFIRM LAYOUT, DIMENSIONS, ADJACENT UTILITIES AND FINAL MATERIALS WITH U OF P OFFICE OF THE UNIVERSITY ARCHITECT. THIS DETAIL TO BE USED AS A GUIDE ONLY. SPECIFIC REVISIONS FOR SITE CONDITIONS AND INTENT ARE THE RESPONSIBILITY OF THE INDIVIDUAL PROJECT DESIGNER.

Facilities & Real Estate Services  
Office of the University Architect  
2022

© UNIVERSITY OF PENNSYLVANIA